

Multi-functional Integrated Optical Circuit Package (MIOC-TQ-18)

Overview

MIOC-TQ-18 is a key component in Fiber Optic Gyroscope (FOG) for measuring angular velocity of an inertial navigation system. This integrated device, fabricated on Lithium Niobate (LiNbO₃) material, is composed of a polarizer, a Y-junction coupler and dual electro-optical phase modulators. Waveguides on the chip are produced by the High Temperature Proton Exchange (HTPE) process. The MIOC (chip) has more than 60dB Polarization Extinction Ratio (PER) and can minimize bias drift resulting from polarization crosstalk induced non-reciprocity. The package of this MIOC is highly reliable and has been proven to pass rigorous temperature cycling test standards.


Key Features

- 1550 ± 20 nm operation
- PM fiber input and output port
- V_π voltage < 4.2 V
- Fiber/chip crosstalk < -20 dB
- Low insertion loss ≤ 3.5 dB
- Push-pull electrode design



Applications

- Fiber Optic Gyroscope (FOG)
- Fiber Optic Current Sensor (FOCS)
- Hydrophone
- CubeSat and SmallSat
- Other Optical Sensing Applications

Mechanical Drawing

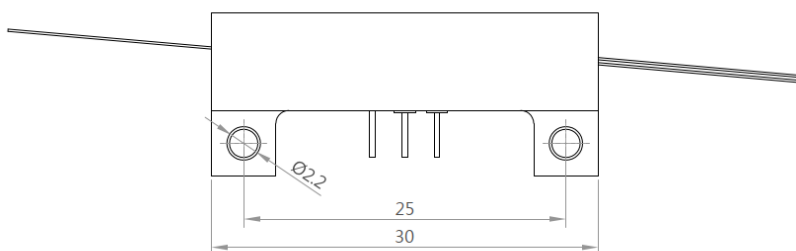

PIN #	Description
1	Case Ground
2	V+
3	V-

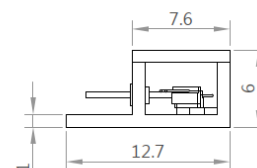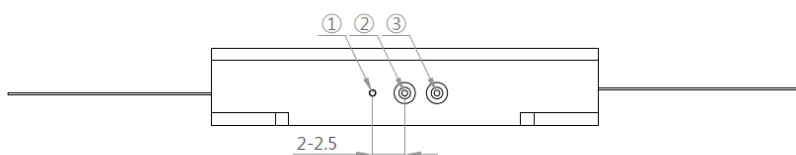

*Unit : mm

Specifications

Model	MIOC-TQ-18
Operating Wavelength	1550 ± 20 nm
Pigtailed Insertion Loss	≤ 3.5 dB
Split Ratio	50 ± 3%
Half-wave Phase Modulation Voltage, V_{π}	< 4.2 V
PM Pigtail Crosstalk	≤ -20 dB
Intensity Modulation	≤ 0.1 % typ.
Electrode Type	Push-pull
Maximum Input Voltage	+/- 15 V
Operating Temperature	-35°C to + 70°C
Product Size	30 x 12.7 x 6 mm
Housing Material	Stainless Steel
Input/Output Fiber Type	Corning RC PM15 80µm cladding diameter
Fiber Length	0.6m (customizable)
Fiber Orientation	Slow Axis aligned to TE Mode
Substrate Material	LiNbO ₃
Crystal Orientation	X-cut, Y-propagation
Waveguide Process	Proton Exchange

Simple Functional Drawing

