


## System Diagram

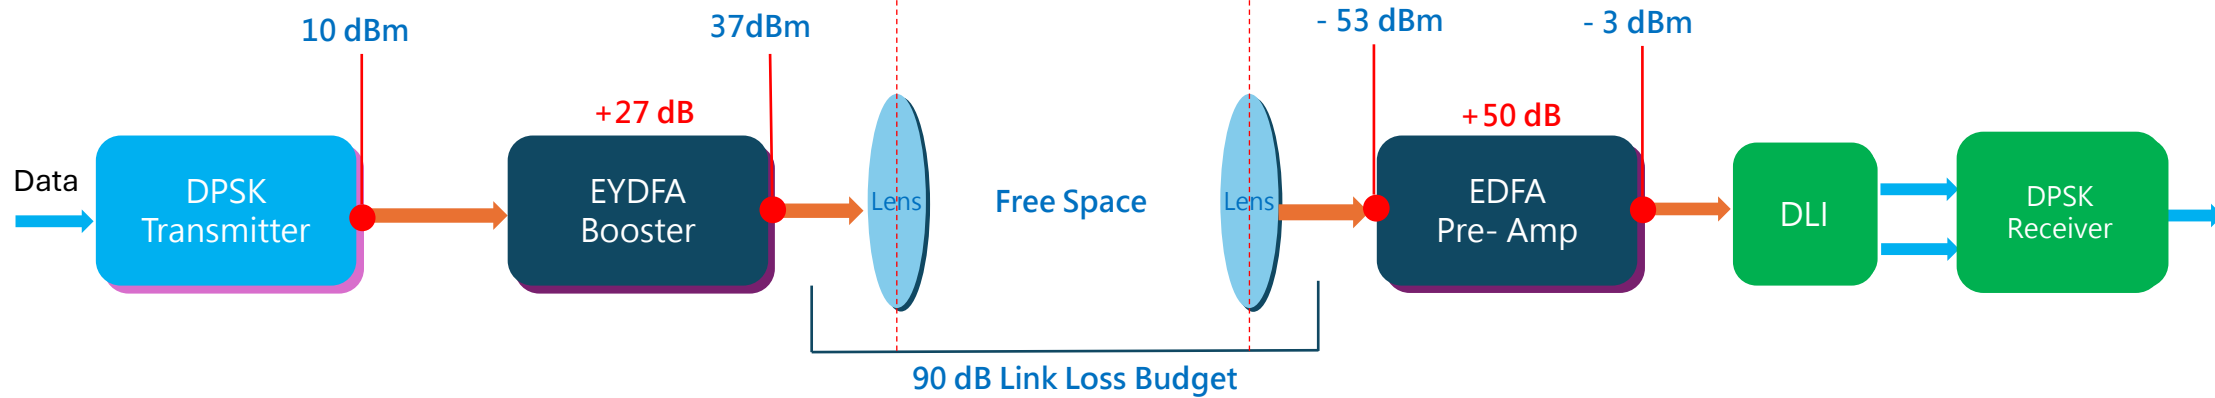

■ LT-DPSK-10-R-TC

- 1540 ~ 1560 nm
- 12 Gb/s DPSK

■ EYDFA-37-BM

- EYDFA-37-PM-BM  
(Polarization Maintaining)
- 1530 ~ 1560nm EYDFA
- Noise Figure 5dB

■ EDFA-PA-LN-N-M

- 1530 ~ 1560 nm
- Noise Figure 4 dB
- Input Power Range : -53dBm ~ -25dBm

■ BPR-22-M

- 1530 ~ 1560 nm
- Input Optical : -10dBm ~ 4 dBm
- Interface to Delay Line Interferometer (DLI)

